


Denominación	Dimensiones							Dimensiones de construcción				Superficie		
	G kg/m	h mm	b mm	t <sub>w</sub> mm	t <sub>f</sub> mm	r <sub>1</sub> mm	r <sub>2</sub> mm	A x100 mm <sup>2</sup>	d mm	Ø	p <sub>min</sub> mm	p <sub>max</sub> mm	A <sub>L</sub> m <sup>2</sup> /m	A <sub>G</sub> m <sup>2</sup> /t
IPN 120	11.1	120	58	5.1	7.7	5.1	3.1	14.2	92.4	-	-	-	0.439	39.38

Propiedades del perfil												
eje fuerte y-y					eje débil z-z							
I <sub>y</sub> mm <sup>4</sup> x10 <sup>4</sup>	W <sub>el.y</sub> mm <sup>3</sup> x10 <sup>3</sup>	W <sub>pl.y</sub> ♦ mm <sup>3</sup> x10 <sup>3</sup>	i <sub>y</sub> mm x10	A <sub>vz</sub> mm <sup>2</sup> x10 <sup>2</sup>	I <sub>z</sub> mm <sup>4</sup> x10 <sup>4</sup>	W <sub>el.z</sub> mm <sup>3</sup> x10 <sup>3</sup>	W <sub>pl.z</sub> ♦ mm <sup>3</sup> x10 <sup>3</sup>	i <sub>z</sub> mm x10	s <sub>s</sub> mm	I <sub>t</sub> mm <sup>4</sup> x10 <sup>4</sup>	I <sub>w</sub> <sup>6</sup> mm <sup>6</sup> x10 <sup>9</sup>	
328	54.7	63.6	4.81	6.63	21.5	7.41	12.4	1.23	28.4	2.71	0.69	

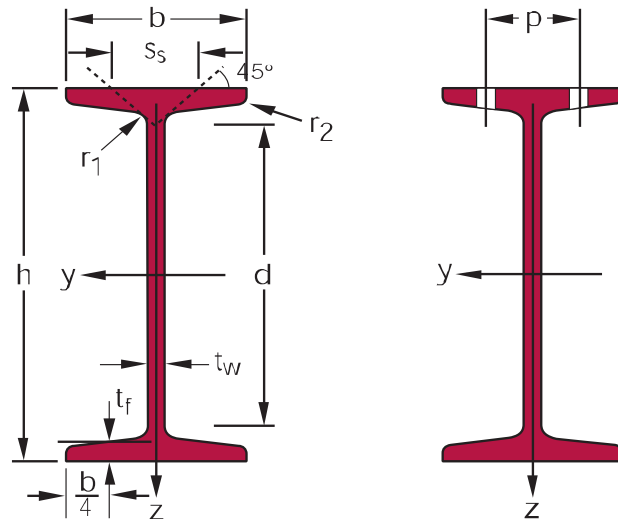

Propiedades Mecánicas		
Límite Elástico	250 (36)	MPa (ksi)
Resistencia a la Tracción	400-550 (58-80)	MPa (ksi)
Estiramiento mínimo	20%	( 200mm )