


Denominación	Dimensiones							Dimensiones de construcción				Superficie		
	G kg/m	h mm	b mm	t _w mm	t _f mm	r ₁ mm	r ₂ mm	A x100 mm ²	d mm	∅	ρ _{min} mm	ρ _{max} mm	A _L m ² /m	A _G m ² /t
IPN 160	17.9	160	74	6.3	9.5	6.3	3.8	22.8	125.8	-	-	-	0.575	32.13

Propiedades del perfil												
eje fuerte y-y					eje débil z-z							
I _y mm ⁴ x10 ⁴	W _{el.y} mm ³ x10 ³	W _{pl.y} ♦ mm ³ x10 ³	i _y mm x10	A _{vz} mm ² x10 ²	I _z mm ⁴ x10 ⁴	W _{el.z} mm ³ x10 ³	W _{pl.z} ♦ mm ³ x10 ³	i _z mm x10	s _s mm	I _t mm ⁴ x10 ⁴	I _w ⁶ mm ⁶ x10 ⁹	
935	117	136	6.4	10.83	54.7	14.8	24.9	1.55	35.2	6.57	3.14	

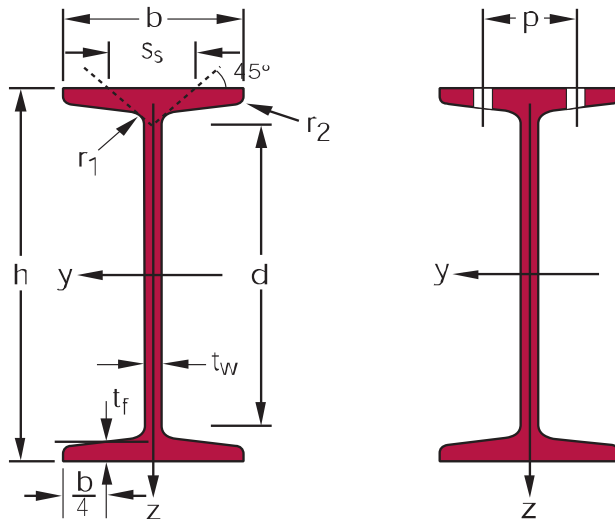

Propiedades Mecánicas		
Límite Elástico	250 (36)	MPa (ksi)
Resistencia a la Tracción	400-550 (58-80)	MPa (ksi)
Estiramiento mínimo	20%	(200mm)